




Recess Boxes

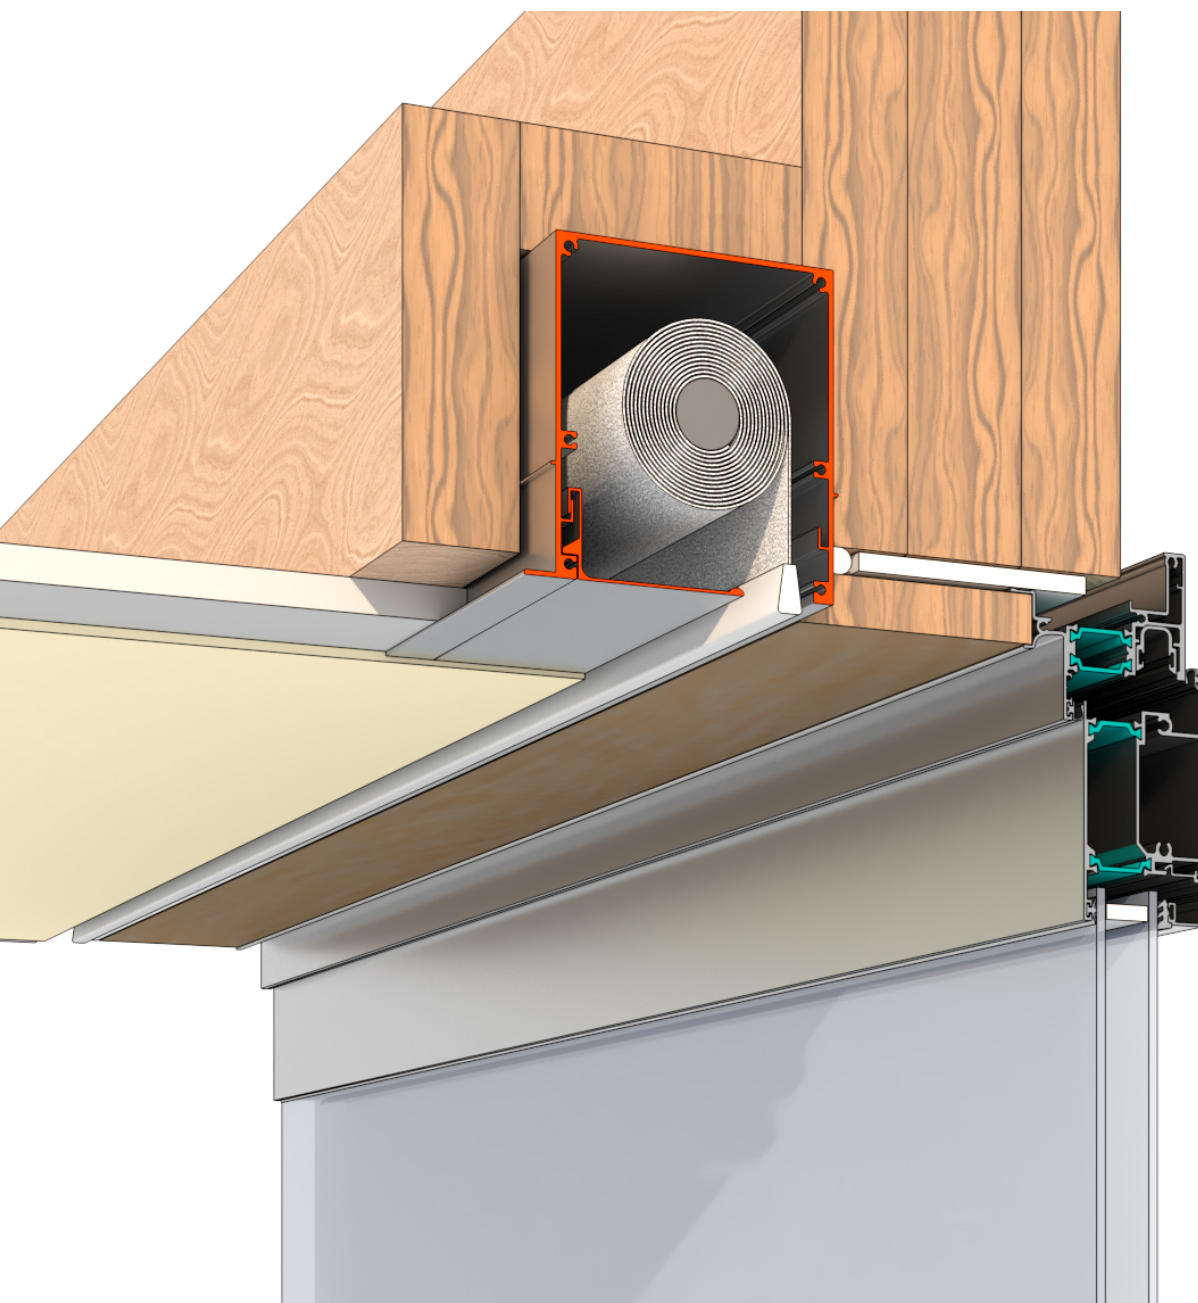

SPECIFICATIONS

Sec. : Recess Box
Date: Oct 2024

Recess Box - Overview


Made from a combination of extruded aluminium and folded aluminium sheet, this sleek modular system allows single or double motorised blinds and curtains to be concealed completely within the ceiling space.

For Roller Blinds, a removable bottom cover leaves only a small slit visible which the blind lowers from and retracts into.


Features:

- Modular recessed box for single and double motorised roller blinds, curtain tracks and headings
- Standard 4.2m long recess box can be shortened or lengthened to custom size
- Standard width recess box, 4.2m long profile made from nominal 1.2mm-2mm gauge extruded aluminium
- Non-standard width recess box, 4.2m long profile made with a combination of nominal 1.2mm-2mm gauge extruded aluminium and folded aluminium sheet
- A removable extruded aluminium bottom cover concealing the blind within (Curtain tracks and headings do not have a bottom cover)
- Bottom recess cover can be connected either at the front or the back internal edge of the recess box
- The sides of the recess box can be either flangeless for negative detail or flanged to provide a tidy cover of the ceiling gib/plaster edge
- Additional recess box aluminium end cap covers come as standard flangeless or you can choose a flanged end cap cover
- Mill finish or can be powder coated in standard Window Treatments' colours: White, Ivory, Chinchilla, Silver Pearl, Bronze, Anthracite, Black or Anodised
- Option for LED strip lighting to be fitted inside the recess box
- PDF and DWG downloads available


Recess Box Configuration Options for Single Blinds

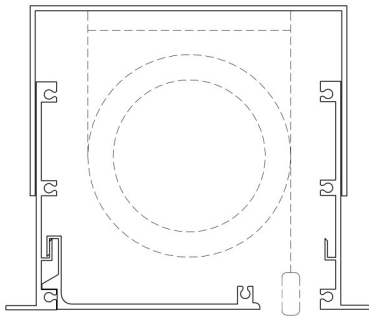


**Single Box
2 Side Flanges
A-SB2SF**

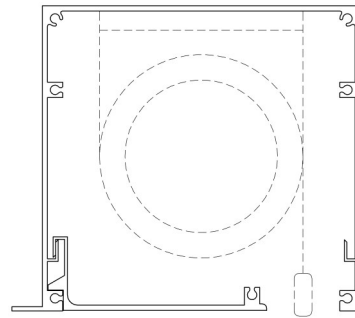

**Single Box
1 Side Flange
B-SB1SF**



**Single Box
No Side Flanges
C-SB0SF**



**Single Part Box
1 Side Flange
SPB1SF**

Part box option allows the builder and architect some flexibility of box dimensions for unique applications. Contact Window Treatments for more information.



End Cap (EC) with or without End Flange (EF)

NOTE ON SINGLE OR DOUBLE RECESS BOXES


Recess Box available in Mill finish or powder coated.

Installation of Recess Box by the Construction Company.


Installation of Blinds and Bottom Cover by Window Treatments NZ Ltd.

Recess Option	Box Width (excluding side flange)	Box Height	Profile Standard Lengths	Maximum Blind Drop	Reversible Bottom Cover Y/N	Standard Box or Bespoke	End Caps (EC)	End Caps with Flanges (EF)
A-SB2SF	125mm	120mm	4200mm	3500mm	Y	Bespoke	Optional	Optional
B-SB1SF	125mm	120mm	4200mm	3500mm	Y	Standard	Optional	Optional
C-SB0SF	125mm	120mm	4200mm	3500mm	Y	Bespoke	Optional	Optional
SPB1SF	(variable)	(variable)	4200mm	N/A	N/A	Bespoke	Optional	Optional


Recess Box Configuration Options for Double Blinds

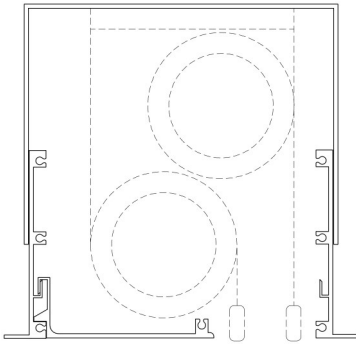


**Double Box
2 Side Flanges
A-DB2SF**




**Double Box
1 Side Flange
B-DB1SF**




**Double Box
No Side Flanges
C-DB0SF**

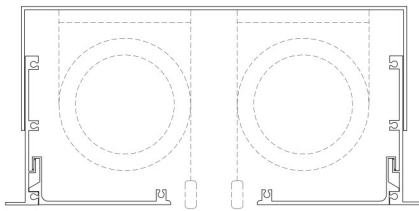


**Double Box
2 Side Flanges
D-DB2SF**

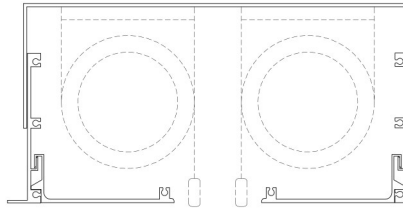


**Double Box
1 Side Flange
E-DB1SF**

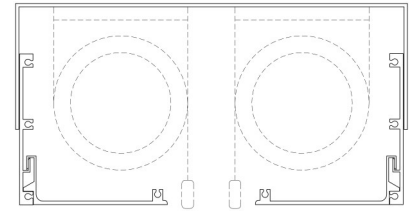


**Double Box
No Side Flanges
F-DB0SF**

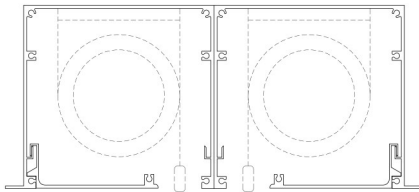

**Double Box
2 x singles side by side. 2 Side Flanges
G-DBSS2SF**

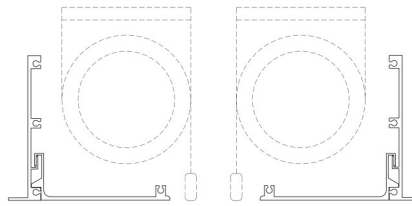

**Double Part Box
2 Side Flanges
DPB2SF**



**End Cap (EC) with or
without End Flange (EF)**

Part box option allows the builder and architect some flexibility of box dimensions for unique applications. Contact Window Treatments for more information.

Recess Option	Box Width (excluding side flange)	Box Height	Profile Standard Lengths	Maximum Blind Drop	Reversible Bottom Cover Y/N	Standard Box or Bespoke	End Caps (EC)	End Caps with Flanges (EF)
A-DB2SF	150mm	160mm	4200mm	2800mm	Y	Bespoke	Optional	Optional
B-DB1SF	150mm	160mm	4200mm	2800mm	Y	Bespoke	Optional	Optional
C-DB0SF	150mm	160mm	4200mm	2800mm	Y	Bespoke	Optional	Optional
D-DB2SF	234mm	120mm	4200mm	3500mm	Y	Bespoke	Optional	Optional
E-DB1SF	234mm	120mm	4200mm	3500mm	Y	Bespoke	Optional	Optional
F-DB0SF	234mm	120mm	4200mm	3500mm	Y	Bespoke	Optional	Optional
G-DBSS2SF	250mm	120mm	4200mm	3500mm	Y	2 x Standard	Optional	Optional
DPB2SF	(variable)	(variable)	4200mm	N/A	N/A	Bespoke	Optional	Optional